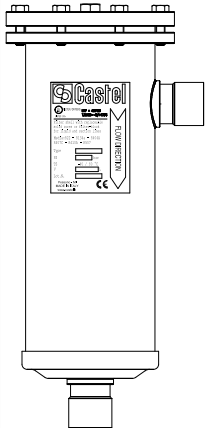


FILTRI DISIDRATATORI A CARTUCCIA SOLIDA RICAMBIABILE - ATTACCHI DI RAME - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.
FILTER DRIERS WITH REPLACEABLE SOLID CORE - COPPER CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.
FILTRES DÉSHYDRATEURS AVEC CARTOUCHE SOLIDE REMPLAÇABLE - RACCORDS EN CUIVRE - HOMOLOGUÉS PAR UNDERWRITERS LABORATORIES INC.
FILTERTROCKNER FÜR UNIVERSAL BLOCKEINSATZ - KUPFER-ANSCHLÜSSE - ZUGELASSEN VON UNDERWRITERS LABORATORIES INC.

Disegno Drawing Dessin Zeichnung	N° Catalogo Part number N° Catalogue Katalog Nr		Attacchi Connections Raccords Anschlüsse ODS		Tipo cartucce Cores type Type cartouches Patronentyp	N° cartucce N° of cores N° cartouches Patronenanzahl	Cubatura nominale Nominal volume Cubature nominale Nominaler rauminhalt [cm³]	PS [bar]	TS [°C]		Confezione n° pz Package pcs Emballage Verpackung
	Coperchio filettato Threaded cover Couvercle fileté Schraubkappe	Coperchio cieco Blind cover Couvercle borgne Blindkappe							Min	Max	
			Ø [in.]	Ø [mm]							
	SF411/5A	SF411/5B	5/8"	16	4490/A 4490/B 4490/AA 4490/AB	1	800	47 (1)	-40	+80	1
	SF411/7A	SF411/7B	7/8"	22							
	SF411/M28A	SF411/M28B	-	28							
	SF411/9A	SF411/9B	1.1/8"	-							
	SF411/11A	SF411/11B	1.3/8"	35							
	SF411/13A	SF411/13B	1.5/8"	-							
	SF411/M42A	SF411/M42B	-	42							
	SF411/17A	SF411/17B	2.1/8"	54							
	SF411/21A	SF411/21B	2.5/8"	-							
	SF412/5A	SF412/5B	5/8"	16		2	1600	47 (1)			
	SF412/7A	SF412/7B	7/8"	22							
	SF412/M28A	SF412/M28B	-	28							
	SF412/9A	SF412/9B	1.1/8"	-							
	SF412/11A	SF412/11B	1.3/8"	35							
	SF412/13A	SF412/13B	1.5/8"	-							
	SF412/M42A	SF412/M42B	-	42							
	SF412/17A	SF412/17B	2.1/8"	54							
	SF412/21A	SF412/21B	2.5/8"	-							
	SF413/7A	SF413/7B	7/8"	22		3	2400	41 (1)			
	SF413/M28A	SF413/M28B	-	28							
	SF413/9A	SF413/9B	1.1/8"	-							
	SF413/11A	SF413/11B	1.3/8"	35							
	SF413/13A	SF413/13B	1.5/8"	-							
	SF413/M42A	SF413/M42B	-	42							
	SF413/17A	SF413/17B	2.1/8"	54							
	SF414/11A	SF414/11B	1.3/8"	35		4	3200	31 (2)			
	SF414/13A	SF414/13B	1.5/8"	-							
	SF414/M42A	SF414/M42B	-	42							
	SF414/17A	SF414/17B	2.1/8"	54							

(1)
MWP = 600 psi in conformità a omologazione UL

(2)
MWP = 450 psi in conformità a omologazione UL

(1)
MWP = 600 psi according to UL approval

(2)
MWP = 450 psi according to UL approval

(1)
MWP = 600 psi conformément à homologation UL

(2)
MWP = 450 psi conformément à homologation UL

(1)
MWP = 600 psi in Übereinstimmung zur UL-Zulassung

(2)
MWP = 450 psi in Übereinstimmung zur UL-Zulassung