




Check Valve

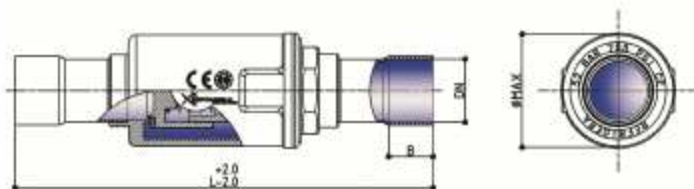

Code	Connections	Weight	ODS	B	Length	Ø Max	KV	PS	WTemp	P.E.D.	
REF	DN	(g)	mm	mm	mm	mm	ΔP:1bar(m³/h)	bar	°C	Group 2 fluids	
REF3.0.N.006.1	6mm	95	6,1	7	107	24	0,68	52		Art.3.3	
REF3.0.N.006.2	1/4"	95	6,4	7	107	24	0,68	52		Art.3.3	
REF3.0.N.008.3	8mm (5/16")	95	8,1	7	112	24	1,00	52		Art.3.3	
REF3.0.N.010.1	10mm	96	10,2	9	112	24	1,40	52		Art.3.3	
REF3.0.N.010.2	3/8"	96	9,7	9	112	24	1,40	52		Art.3.3	
REF3.0.N.012.1	12mm	100	12,2	12	120	24	2,95	52		Art.3.3	
REF3.0.N.012.2	1/2"	100	12,8	12	120	24	2,95	52		Art.3.3	
REF3.0.N.015.1	15mm	285	15,2	12	152	36	4,10	52		Art.3.3	
REF3.0.N.016.3	16mm (5/8")	280	16,2	14	152	36	4,10	52		Art.3.3	
REF3.0.N.018.1	18mm	285	18,2	14	152	36	4,55	52		Art.3.3	
REF3.0.N.018.2	3/4"	285	19,3	14	152	36	4,55	52		Art.3.3	
REF3.0.N.022.3	22mm (7/8")	350	22,3	17	180	36	5,10	52		Art.3.3	
REF3.0.N.028.1	28mm	1200	28,2	20	230	55	12,75	52	-40/+150	Art.3.3	
REF3.0.N.028.2	1-1/8"	1200	28,8	20	230	55	12,75	52		Art.3.3	
REF3.0.N.035.3	35mm (1-3/8")	1560	35,2	25	240	66	24,90	52		ClassI	
REF3.0.N.042.1	42mm	2390	42,2	28	270	80	35,06	52		ClassI	
REF3.0.N.042.2	1-5/8"	2390	41,5	28	270	80	35,06	52		ClassI	
REF3.0.N.054.3	54mm (2-1/8")	3430	54,3	36	295	93	54,70	52		ClassI	
REF3.0.N.064.1.W	64mm	3510	64,0	36	310	93	57,10	45		ClassI	
REF3.0.N.067.2.W	2-5/8"	3510	66,8	36	310	93	60,50	45		ClassI	
REF3.0.N.064.1	64mm	3530	64,0	36	310	93	130,00	45		ClassI	
REF3.0.N.067.2	2-5/8"	3530	66,8	36	310	93	130,00	45		ClassI	
REF3.0.N.076.3	76mm (3")	6100	76,1	36	362	118	144,50	45		ClassI	
REF3.0.N.080.3	80mm (3-1/8")	6100	80,0	36	362	118	144,50	45		ClassI	

W:ReducedPort

N:standard spring valve with minimum Opening Pressure Differential =0,1 bar

R:reinforced spring valve with minimum Opening Pressure Differential=0,3 bar