




Brass Rotalock Valve

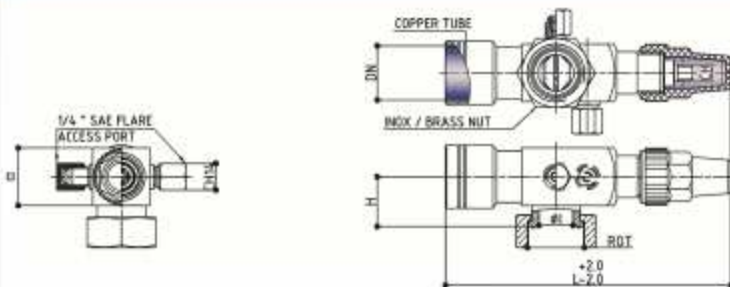

Code	ODS	Connection	NUT	Weight	Length	Spanner	H	□	ØI	Kv	WTemp	P.E.D.
REF	DN	Ø	ROT	(g)	L (mm)	CH(mm)	(mm)	(mm)	(mm)	ΔP:1 bar (m/h)	°C	Group ² fluids
REF22.42.20.006	6 mm	6,1	1"	258	108	6,35	23	20	12	0,41		Art.3.3
REF22.42.20.014	14"	6,4	1"	258	108	6,35	23	20	12	0,41		Art.3.3
REF22.42.20.010	10 mm	10,2	1"	268	108	6,35	23	20	12	1,63		Art.3.3
REF22.42.20.038	38"	9,7	1"	268	108	6,35	23	20	12	1,63		Art.3.3
REF22.42.20.012	12 mm	12,2	1"	272	108	6,35	23	20	12	2,36		Art.3.3
REF22.42.20.127	12"	12,8	1"	272	108	6,35	23	20	12	2,36		Art.3.3
REF22.42.20.016	16 mm 5/8"	16,2	1"	284	108	6,35	23	20	12	3,39		Art.3.3
REF22.42.20.018	18 mm	18,2	1"	284	112	6,35	23	20	12	3,11		Art.3.3
REF22.42.20.034	3/4"	19,3	1"	292	112	6,35	23	20	12	3,11		Art.3.3
REF22.42.20.022	22 mm 7/8"	22,3	1"	292	112	6,35	23	20	12	3,00		Art.3.3
REF22.43.22.010	10 mm	10,2	1-1/4"	314	110	6,35	24	22	13	1,63		Art.3.3
REF22.43.22.038	38"	9,7	1-1/4"	320	110	6,35	24	22	13	1,63		Art.3.3
REF22.43.22.012	12 mm	12,2	1-1/4"	320	110	6,35	24	22	13	2,31		Art.3.3
REF22.43.22.127	12"	12,8	1-1/4"	320	110	6,35	24	22	13	2,31		Art.3.3
REF22.43.22.016	16 mm 5/8"	16,2	1-1/4"	320	112	6,35	24	22	13	3,36		Art.3.3
REF22.43.22.018	18 mm	18,2	1-1/4"	335	112	6,35	24	22	13	3,84		Art.3.3
REF22.43.22.034	3/4"	19,3	1-1/4"	335	112	6,35	24	22	13	3,46		Art.3.3
REF22.43.30.018	18 mm	18,2	1-1/4"	515	140	8,00	27	30	19	6,65		Art.3.3
REF22.43.30.034	3/4"	19,3	1-1/4"	515	140	8,00	27	30	19	6,65	-40/+150	Art.3.3
REF22.43.30.022	22 mm 7/8"	22,3	1-1/4"	535	142	8,00	27	30	19	10,19		Art.3.3
REF22.43.30.028	28 mm	28,2	1-1/4"	535	150	8,00	27	30	19	10,53		Art.3.3
REF22.43.30.118	1-1/8"	28,8	1-1/4"	535	150	8,00	27	30	19	10,53		Art.3.3
REF22.44.30.018	18 mm	18,2	1-3/4"	650	145	8,00	27	30	19	6,58		Art.3.3
REF22.44.30.034	3/4"	19,3	1-3/4"	650	145	8,00	27	30	19	6,58		Art.3.3
REF22.44.30.022	22 mm 7/8"	22,3	1-3/4"	600	145	8,00	27	30	19	10,12		Art.3.3
REF22.44.30.028	28 mm	28,2	1-3/4"	614	150	8,00	27	30	19	11,34		Art.3.3
REF22.44.30.118	1-1/8"	28,8	1-3/4"	614	150	8,00	27	30	19	11,34		Art.3.3
REF22.44.35.028	28 mm	28,2	1-3/4"	614	165	9,60	31	35	24	11,74		Art.3.3
REF22.44.35.118	1-1/8"	28,8	1-3/4"	792	165	9,60	31	35	24	11,74		Art.3.3
REF22.44.35.035	35 mm 1-3/8"	35,2	1-3/4"	792	170	9,60	31	35	24	15,58		ClassI
REF22.44.35.042	42 mm	42,2	1-3/4"	814	170	9,60	31	35	24	13,00		ClassI
REF22.44.35.158	1-5/8"	41,5	1-3/4"	928	170	9,60	31	35	24	13,00		ClassI
REF22.45.50.035	35 mm 1-3/8"	35,2	2-1/4"	1620	200	9,60	36	50	39	25,45		ClassI
REF22.45.50.042	42 mm	42,2	2-1/4"	1650	200	9,60	36	50	39	33,08		ClassI
REF22.45.50.158	1-5/8"	41,5	2-1/4"	1650	200	9,60	36	50	39	33,08		ClassI
REF22.45.50.054	5/4 mm 2-1/8"	54,3	2-1/4"	1690	200	9,60	36	50	39	31,24		ClassI