

BSR SERIES

High efficiency, high performance,
reliable screw refrigerant compressor






Outline dimension

BSR21X~42X

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
BSR21X	1261	569	400	362	241	515	461	95	31	90	55	22	50
BSR31X	1371	574	400	425	299	581	486	121	28	110	75	22	50
BSR32X	1535	634	400	462	346	648	521	117	37	90	85	22	50
BSR41X	1649	670	500	462	334	661	538	117	30	40	76	22	60
BSR421~426	1878	752	500	590	397	827	655	115	—	115	55	25	60
BSR427/428	2044	752	500	590	499	887	654	221	69	115	55	25	60

Unit: mm

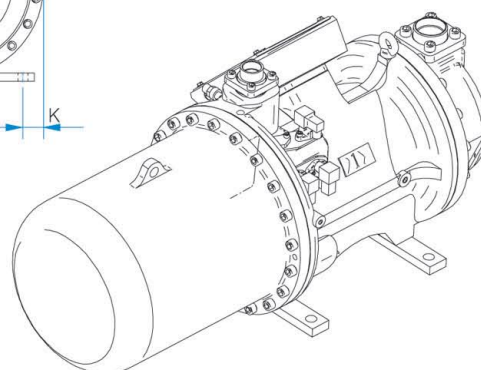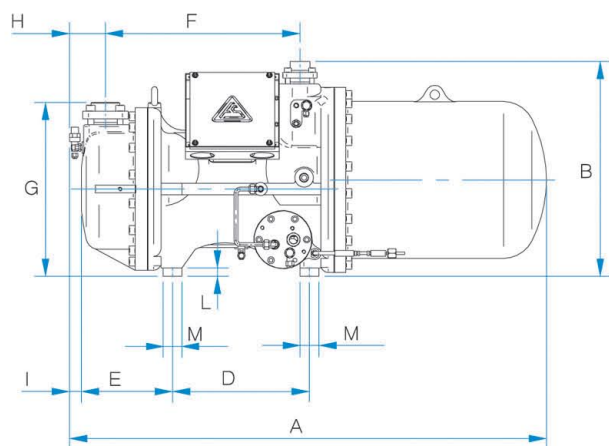


Outline dimension

BSR516L / 518L / 614L / 616L

Model	A	B	C	D	E	F	G	H	I	J	K	L
BSR516L	788	325	265	650	26	843	892	732	482	365	1094	100
BSR518L	821	325	265	650	26	841	892	842	510	365	1230	100
BSR614L / 616L	878	325	265	650	26	926	980	842	510	365	1224	70

Unit: mm

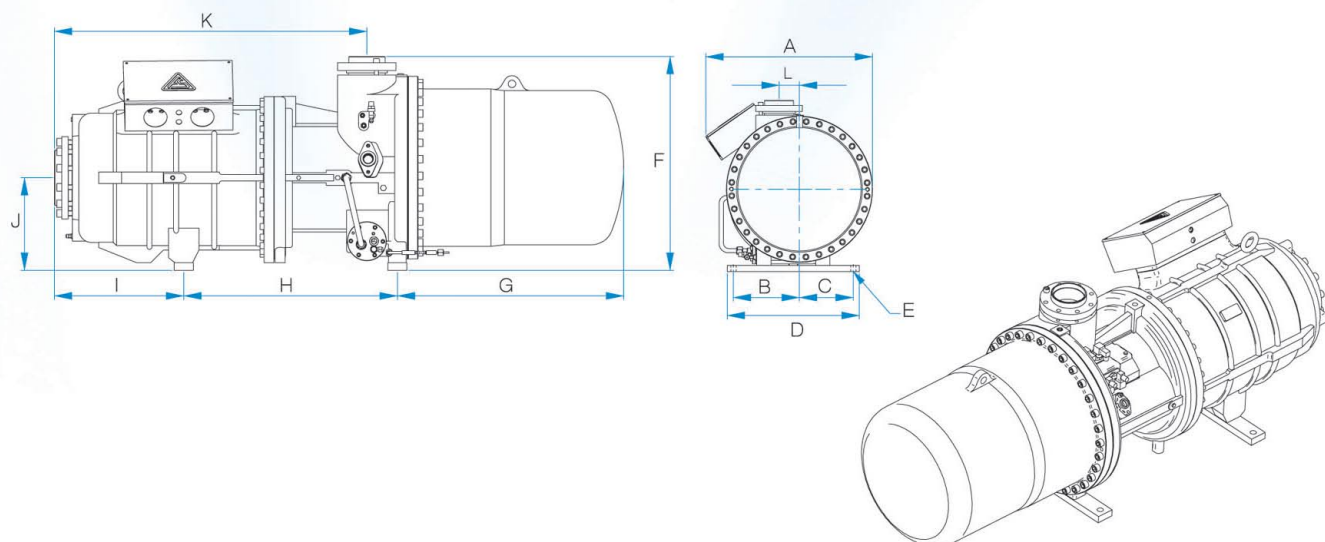

Outline dimension

BSR513 / 514 / 516 / 613 / 614 / 616

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
BSR513 / 514 / 516	780	250	250	560	26	680	441	581	460	1676	344	286	482
BSR613 / 614 / 616	915	250	250	560	26	827	493	704	420	1885	449	355	468

Unit: mm

